

powerbass®
X T R E M E



2XL-1004D

2XL-1204D

2XL-1504D

2XL SUBWOOFER SERIES

Application Guide



Thank you and Congratulations

Congratulations on your decision to purchase PowerBass Xtreme "2XL" series subwoofers. These top-of-the-line speakers are the result of years of extensive engineering and testing, resulting in the finest car audio subwoofers you can purchase today.



At PowerBass USA, Inc. we are confident you will have many years of outstanding enjoyment from your investment. For maximum performance we recommend that you have your new PowerBass Xtreme product installed by an Authorized PowerBass Xtreme Dealer. Doing so will also automatically extend your warranty to a full THREE-YEAR Period.

To learn more about PowerBass Xtreme, please visit us on the World Wide Web at <http://www.powerbassusa.com>

⚠ Warning ⚠

Continuous exposure to sound pressure levels in excess of 100 dB can cause permanent hearing loss. PowerBass Xtreme Speakers are capable of producing sound pressure levels well over 170 dB. Please observe all local sound ordinances while listening to your PowerBass Xtreme system. PowerBass USA, Inc. accepts no liability for hearing loss, bodily injury, or property damage due to the result of use or misuse of this product.

CAUTION

To prevent damage to your speakers, please observe the following caution:

Your PowerBass Xtreme Super Sub is made with the highest quality materials designed for years of trouble free performance. However, damage to the speaker can occur when the amplifier, regardless of output power, is made to play at levels higher than it was intended. At high volume levels, if the music sounds distorted lower the volume. The audible distortion you hear is probably originating in the amplifier which can cause the speaker cone to move out of control and force the voice coil to bottom out and slam against the magnet assembly. Under these circumstances it will be necessary to lower the volume to just below the point where these symptoms occur to avoid damage to the speaker. If your amplifier has a gain control, it would be advisable to lower this control slightly to prevent this from reoccurring.

If more volume or a higher SPL (Sound Pressure Level) is desired, you should try adding additional speakers to the system. By doing so, it is possible to gain significant increases in sound pressure levels. In some cases, you may double the system's output without any deterioration in sound quality.

REMINDER

- **This speaker is heavy, so use caution when installing or handling it.**
- **The subwoofer enclosure must be securely & directly attached to the vehicle.**
- **Speakers will become very hot when the system is operated at high power continuously for a long period of time. Never directly touch the speakers with your bare hands until the speakers have cooled.**
- **Never connect only one voice coil of this Dual Voice Coil (DVC) speaker. BOTH voice coils must be connected to the amplifier for correct operation.**

POWERBASS XTREME 2XL WOOFER FEATURES

IMFPM Cone

A new material designed for high powered/high pressure environments in which a FP Matrix “Foam Sandwich” was created to provide a very rigid and stable surface that will prevent cone krumpling while increasing bass response.

Custom Aluminum Basket with Voice Coil Perimeter Aerovents: This cast aluminum basket is manufactured to the highest quality standards to ensure maximum excursion, exceptional alignment of the subwoofer’s motor structure and moving parts while providing an extremely rigid, non-resonant frame.

Pro-Lock Input Terminals: Giving your woofer all of the current and voltage that it needs to perform up to maximum capability is why we have designed these Pro-Lock terminals. They insure a tight and energy efficient connection between your amplifier and the woofers voice coil. They also simplify wiring in multiple speaker installations.

Vented BKSX Voice Coil Former with Bonder 360 Adhesive: These specially designed Kapton™ coils are coated with Herson® Bonder 360 to provide a thermal shock resistant bond that can withstand temperatures of 600°F (316°C). This dramatically increases heat dissipation and increases power handling.

Xtra Xtra Large Motor Structure: Just like a cars’ engine, the motor structure of a woofer drives the cone. This dual stack motor will allow your 2XL woofer to handle lots of power while delivering accurate linear movement for tight deep bass.

Custom Billet Aluminum Trim Ring: Clamps the surround for a better grip on the frame by holding it in-between the ring and frame. This ensures the surround will stay in place during high excursion of the woofer cone.

U-turn High Roll Santoprene Surround: This high roll surround is used to ensure long and linear travel throughout the entire excursion range resulting in more bass output and higher SPL. The nonstandard “U” design also gives the woofer more cone area to move more air and make more bass.

*Herson 360 Bonder is a product of Herson Manufacturing, Inc.
Kapton® is a registered trademark of E.I. du Pont de Nemours and Company
Santoprene® is a registered trademark of ExxonMobil Chemical Co.*


WIRING GUIDELINES

It is highly recommended that you seek an authorized PowerBass dealer to properly setup, wire and install your woofers for maximum performance.

All PowerBass Xtreme subwoofers use dual voice coils. The use of dual voice coils offers you more versatility in system configuration. It is important to know the limits of your amplifier to optimize its performance. It is always better to use your subwoofer in a mono / bridged mode if your amplifier has the capabilities. There are basically four different types of wiring configurations: Series, Parallel, Series-Parallel or Parallel-Parallel. It is possible to change the impedance or load by how the speakers are to be wired and by the quantity of woofers used.

DUAL VOICE COIL WIRING


PARALLEL

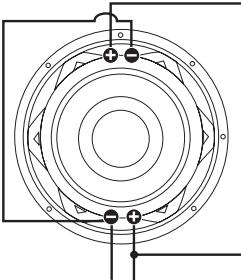

Amplifier

Parallel wiring a dual 4 ohm sub = 2 ohm


SERIES

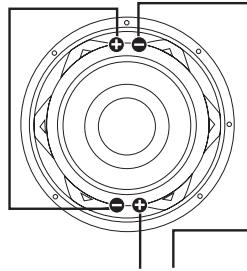

Amplifier

Series wiring a dual 4 ohm sub = 8 ohm


PARALLEL-PARALLEL

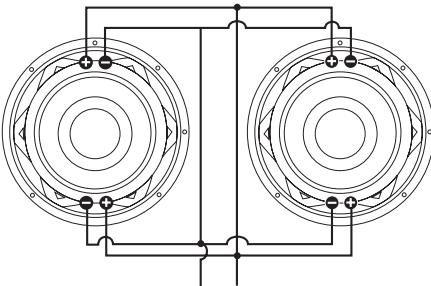

Amplifier

Parallel-Parallel wiring two dual 4 ohm subs = 1 ohm

SERIES-PARALLEL

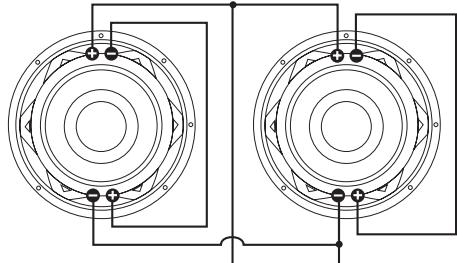

Amplifier

Series-Parallel wiring two dual 4 ohm subs = 4 ohm

NOTE: Never connect only one coil of a Dual Voice Coil (DVC) speaker. BOTH voice coils must be connected to the amplifier

INSTALLATION EXPERIENCE

Installation of PowerBass Xtreme Speakers requires experience with a variety of mechanical and electrical procedures. This manual provides only general installation and operation instructions. If you have any reservations about your installation skills or lack of the proper tools, please contact your local PowerBass Xtreme dealer for assistance.

CHOOSING A SPEAKER ENCLOSURE

The PowerBass Xtreme 2XL Subwoofers are engineered to perform at their optimum level in a Sealed enclosure. However, while not optimum, these woofers may also be used in vented and bandpass enclosures. For maximum performance we recommend you have your new PowerBass Xtreme Subwoofer installed by an Authorized PowerBass Xtreme Dealer.

- **SEALED BOX: (RECOMMENDED)** A sealed or acoustic suspension enclosure is easy to build and typically offers a smaller size enclosure and greater power handling. It has the most predictable frequency and phase response; the bass response will roll off slower than that of a ported design. Sealed boxes typically provide the best musical detail and definition. A well-designed sealed enclosure will exhibit smooth frequency response with excellent sound quality and great low bass extension. They also exhibit relatively accurate, punchy bass reproduction for most types of music. If a sealed enclosure is too large to fit into a specific area of a vehicle, it is possible to decrease the recommended box volume by using 1.5 pounds per cubic feet of low density, high heat specific box stuffing material. PowerBass recommends Fiberglass, Dacron, Poly-Fill or long fiber wool for stuffing the enclosure. (Decreasing the box enclosure however should not exceed 20% of the recommended size.) When using any type of box stuffing material be sure that the subwoofer's vented pole piece is clear from any obstructions, since covering the pole piece will result in loss of bass and can possibly cause damage to your subwoofer. The most important aspect of a sealed enclosure is to make sure that it is airtight and solid. If your enclosure has any air leaks or if the panels vibrate or flex, you will experience a loss of bass output. Using glue and some type of sealant (caulk) on all seams will ensure a solid constructed box without any air leaks.
- **VENTED BOX: (NOT OPTIMUM)** Also known as a ported or bass reflex enclosure, this type of box is almost as easy to construct as a sealed enclosure. This design however is more efficient and results in an increase of bass output at certain frequencies. Although vented enclosure has an output advantage at some frequencies, it also has a steeper rolloff, which will only affect bass frequencies below port tuning. Air inside the port will move in phase with the subwoofer reinforcing frequencies above the F3 (-3dB point). The SPL advantage of the vented enclosure comes from the fact that the effect of the vent tuning reduces the excursion of the subwoofer near the tuning frequency allowing more SPL to be produced before the subwoofer bottoms.

Damping material should also be used to line the internal walls to reduce any sonic reflection. Because of the characteristics of a vented enclosure, subwoofers typically will become unloaded (act as if it is not in a box) at frequencies of ½ octave below the enclosure tuning frequency. Using a high pass filter / subsonic filter will help prevent the subwoofer from unloading or exceeding its excursion capabilities. It is important to stay within the recommended enclosure specifications. (PowerBass recommends port placement to coincide on the same panel or baffle that the subwoofer resides on.


- **BANDPASS ENCLOSURE: (NOT OPTIMUM)** The most common bandpass enclosure is a combination of a sealed and a vented enclosure working together (4th order or single reflex bandpass system). The rear of the speaker goes into the sealed chamber while the front of the speaker goes into the vented chamber. Because the vent produces all the sound generated from this type of enclosure, sound quality may not be as good as a well-designed ported or sealed design. Often the sacrifice for sound quality and subwoofer cone control is greater SPL output. However unlike a sealed or vented enclosure, you can effectively increase the enclosure sensitivity with the appropriate tuning choices. You can choose to design a narrow frequency band with very high sensitivity or choose a wide frequency band with the sacrifice of lower sensitivity. The damping effect of the vented chamber reduces the motion of the cone so that potentially higher sound output is achieved without the subwoofer reaching its mechanical limits. Minor deviations from design recommendations however may result in frequency response and distortion problems.

(If you are intending to use multiple subwoofers in your system, PowerBass recommends having separate chambers for each subwoofer if the subwoofers will be operated by two different amplified signals. This will prevent any possible cancellation.)

NOTE: Due to the vented backplate, you must allow an additional 2" behind the subwoofer when designing your speaker enclosure.

ENCLOSURE VOLUME

To calculate the volume required for your enclosure please refer to the Recommended Enclosures section of this guide for your specific model number. These are listed in both cubic feet and liters. One cubic foot is expressed as 12" x 12" x 12" = 1728 cubic inches (see picture below).

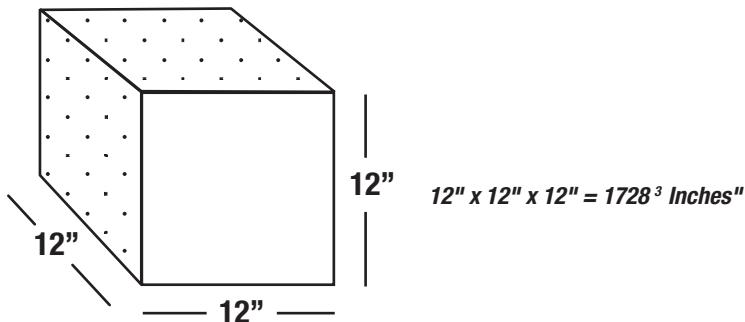

TIPS TO GET THE MOST OUT OF YOUR 2XL WOOFER

Your PowerBass Xtreme subwoofer has been meticulously engineered and designed to handle high power musical reproduction. Despite their rugged construction, it is possible to damage your speaker if they are improperly used. In general, you will hear distortion as a so-called warning before any damage occurs. If you hear distortion in your system, immediately reduce the musical level to the point where the sound retains its clarity.

1. All PowerBass Xtreme subwoofers require an initial break-in period before it will reach optimum performance. Like any new precision machinery, allow a minimum of several days to one week with normal daily usage to ensure that the suspension has properly been broken-in.
2. Never use only one coil on a dual voice coil subwoofer. Doing so will significantly decrease the efficiency and power handling of the speaker.
3. Be sure you supply the speakers with enough unclipped amplifier power to drive them properly. (More damage can be done to a speaker by under-powering and clipping your amplifier than any other way!)
4. Where possible, run your Speakers in mono instead of stereo. Most bass is reproduced in mono so there is less chance of any cancellation if played in mono.
5. Where possible, wire your Speakers in parallel instead of series. Bass is reproduced either way but again there is less chance of cancellation in parallel. NOTE: Be sure the amplifier you are using is stable to the resulting impedance of the speaker load!
6. Where possible, a separate amplifier just for your subwoofers should be used with an electronic crossover to set the frequency range.
7. Do not block the front of your speakers or ports. You want as much direct air coupling as possible. Also be sure to round off the inside edges of the port to reduce any port noise.
8. For ported enclosures, keep in mind that you must leave at least twice the port diameter size between the subwoofer and the port itself. Leave at least one time the port diameter between the port and any walls of the enclosure.
9. Remember the Golden Rule "Measure twice...cut once."

BOX CONSTRUCTION (SEALED OR VENTED): The material used for enclosure walls should be solid, dense and free of voids or warps. Your enclosure should be made $\frac{3}{4}$ " or 19mm material, Finland or Baltic birch type plywood is recommended where the enclosure will be transported frequently. High-density fiberboard - MDF (not chip board) can be used on permanently installed systems. Minimum of 1" (25mm) or double $\frac{3}{4}$ " (1-1/2") baffle is recommended on high-powered SPL applications. Corners must be strong and air tight and should not have any air leaks or openings. Joints should be properly filled with glue that will not crack under high stress or impact. If the integrity of the glue seal can't be determined, hot glue or RTV caulking should be used to seal all seams. Fiber reinforced resin may also be used to form any difficult shapes. However avoid making large panels with resin to eliminate any chances of box flexing, cracking or ratting under high pressure. Bracing made of 2 x 2" or 2 x 4" should be liberally applied either inside or outside the cabinet, depending on whether the cabinet is to be permanently installed or portable. This principle applies to any walls of the enclosure spanning more than 18" long. Any braces should also be liberally glued or screwed down on edge. Edge-wise drilled, and countersunk holes through the braces can be used for #10-2 Flathead wood screws to avoid the use of more expensive lag bolts. The majority of strength from an enclosure comes from the glue. When using screws be sure to pre-drill holes to avoid splitting the wood. ***Note: Do not mount the woofer in the enclosure within 24 hours of sealing the internal joints. The gasses given off as the sealer cures can affect the surround of the speaker resulting in permanent damage that will void the warranty.***

WARNING! The use of silicone rubber to seal in a speaker will void the Warranty! If any sealing is needed in addition to the speaker's gasket, use caulking cord or vinyl weather strip.

BREAK IN PERIOD

To get the most from your woofer we recommend a "break-in" period of at **least 40 hours** at no more than 1/3 of maximum volume.

During this time the cone and spider assembly will gradually break in resulting in greater performance and more listening enjoyment.

SUBWOOFER CROSSOVER SETTING

Your PowerBass Xtreme Super Sub will perform best if it is used in conjunction with a subwoofer crossover of some kind. Using a crossover will remove unwanted high frequencies and allow them to concentrate only on bass. The two most common types of crossovers are "passive" or "active" (electronic crossovers are active). Many amplifiers have a built in Low Pass (LPF) electronic crossover circuit. For optimum subwoofer performance we recommend an initial electronic crossover setting between 80-100Hz and then tuning the bass to your liking.

PREPARING FOR INSTALLATION

NOTE: The tools listed below may be required for basic installation.

- An electric drill with bits
- Saber, circular and jig saw
- Phillips-head and standard screwdrivers
- Wire strippers
- Crimping tool and needle-nose pliers
- Silicone sealant (for enclosures), closed cell weather-stripping (for the speakers)

INSTALLATION PRECAUTIONS

NOTE: Proceed only if you are a qualified installer otherwise; let your dealer do it.

- Always wear protective eyewear when using tools.
- Turn off all stereo and other electrical devices before you begin.
- Disconnect the (-) negative lead from your vehicle's battery.
- Keep the speakers in the package until final installation, and always rest it with the cone facing up. Never use force when installing a speaker.
- Locate all fuel lines, brake lines, oil lines, and electrical cables when planning your installation.
- Check to see if there is enough clearance behind the mounting surface before drilling holes or installing screws for proper speaker ventilation.
- Also make sure there's enough front clearance for speaker cone excursion. Failure to do this could cause the cone to vibrate against any obstructing object.
- Use a utility knife to trim away fabric from the speaker mounting hole location before drilling. It is hard to get a good seal if you have both the carpet & subwoofer gasket between the speaker and the enclosure.
- When running speaker wires through sheet metal, be sure to use grommets to properly insulate the wires from metal edges.

PARAMETERS FOR POWERBASS 2XL SERIES SUBWOOFER

(Due to Constant Improvements, Specifications and Parameters are subject to change without notice.)

	2XL-1004D	2XL-1204D	2XL-1504D
VC Impedance (ohms)	4Ω + 4Ω	4Ω + 4Ω	4Ω + 4Ω
Test Impedance (ohms)	1.5	1.5	1.5
Fs (Hz)	34	28	27
SD (sqCM)	346	510	804
Vas (Ltr)	20.2	55.4	100.2
Cms (µM/N)	118.6	149.5	101.2
Mms (g)	176.2	244.6	336.5
BL™	11.4	11.9	12.2
Qms	5.1	4.89	6.1
Qes	0.45	0.44	0.61
Qts	0.41	0.4	0.55
No (%)	0.18	0.21	0.29
Spl (dB)	91	92	93
Xmax (mm)	13	13	13
Voice Coil Size (inches)	2.5	2.5	2.5
Frequency Response (Hz)	30-500	25-450	23-450
Motor Structure (ounces)	280 oz.	280 oz.	316 oz.
Magnet Weight	108 oz.	108 oz.	115 oz.
Mounting Depth (inches)	5.78" 147mm	6.57" 167mm	8.267" 210mm
Power (RMS/Peak)	400/800 watts	450/900 watts	500/1,000 watts

POWER RECOMMENDATIONS

Many speaker and amplifier brands measure their power ratings in different ways. Often the stated "Max Power handling" are viewed as continuous RMS power handling of the speaker, when actually the "Max" is generally the breaking point of the speaker.

In an effort to minimize any confusion, PowerBass has chosen to rate our Super Subs in the following manner:

NOMINAL POWER HANDLING

Playing your woofer at levels below the Pe-RMS spec will allow the woofer to operate at optimum conditions and cause the speaker minimal mechanical degradation over time.

Pe-RMS POWER HANDLING

Pe-RMS is the highest power rating we assign the woofer for continuous use under normal conditions. Exceeding this power level for extended durations will result in mechanical degradation that may lead to possible failure over time.

Pe-MAXIMUM POWER HANDLING

Pe-Maximum is the maximum power rating the woofer can handle for short bursts or peak transients with clean input power. Exceeding this power level or using dirty (distorted input power) will cause thermal failure that will void the speaker warranty.

RECOMMENDED ENCLOSURES

Please note that these enclosure volume recommendations are for the internal airspace inside the enclosure and include the displacement of the subwoofer and ports. When choosing your enclosure type, please pay close attention to your specific woofer, failing to use the correct enclosure may result in lower power handling and poor sound quality. **To calculate the internal airspace required, take the internal dimensions of the box. First multiple these number by themselves and then divide this sum by 1728. (W x H x D) / 1728.** Please contact your authorized PowerBass Autosound dealer for other designs and specifications. **(Even though these subwoofers can be used in a ported enclosure, PowerBass recommends a sealed enclosure for optimum performance and sound quality.)**

2XL-1004D

Optimum Sealed Vol.	English	Metric
Gross Vb Internal	0.75 cu.ft	21.24 Liters
Fc, (resonance frequency of of the closed box system)	47Hz	47Hz
F3 (-3dB Cutoff)	43Hz	43Hz
External Dimensions of the enclosure WxHxD, 3/4" (19mm) MDF	14 x 13.5 x 10.25"	35.6 x 34.3 x 26 cm
Qtc	0.68	0.68
Pe (Watts-Rms)	100-400 Watts	100-400 Watts
Acceptable Volumes	(0.65 - 1.25 cu. ft)	(18.4 - 35.4 Liters)

Optimum Ported Vol.	English	Metric
Gross Vb Internal	1.25 cu.ft	35.4 Liters
External Dimensions of the enclosure WxHxD, 3/4" (19mm) MDF	13 x 15 x 17"	33 x 38.1 x 43.2mm
Internal port opening size, W x H	11.5 x 1.5"	29.2 x 3.8 cm
Internal port Length	24.5"	62.2 cm
Fb (Box Tuning)	36Hz	36Hz
F3 (-3dB Cutoff)	39Hz	39Hz
Pe (Watts-Rms)	100-400 Watts	100-400 Watts
Subsonic Filter Setting if Applicable	39Hz	39Hz

Note: Due to the vented backplate, you must allow an additional 2" behind the suwoofer when designing your speaker enclosure.

2XL-1204D

Optimum Sealed Vol.	English	Metric
Gross Vb Internal	1.25 cu.ft	35.4 Liters
Fc, (resonance frequency of of the closed box system)	43Hz	43Hz
F3 (-3dB Cutoff)	40Hz	40Hz
External Dimensions of the enclosure WxHxD, 3/4" (19mm) MDF	15 x 14.5 x 14"	38 x 36.8 x 35.6 cm
Qtc	0.69	0.69
Pe (Watts-Rms)	100-450 Watts	100-450 Watts
Acceptable Volumes	(0.75 - 2.25 cu. ft)	(21.24 - 63.7 Liters)

Optimum Ported Vol.	English	Metric
Gross Vb Internal	2.25 cu.ft	63.7 Liters
External Dimensions of the enclosure WxHxD, 3/4" (19mm) MDF	15.5 x 18.5 x 18"	39.4 x 46.9 x 45.7cm
Internal port opening size, W x H	14 x 2.0"	35.6 x 5.1 cm
Internal port Length	25"	63.5 cm
Fb (Box Tuning)	32Hz	32Hz
F3 (-3dB Cutoff)	34Hz	34Hz
Pe (Watts-Rms)	100-450 Watts	100-450 Watts
Subsonic Filter Setting if Applicable	34Hz	34Hz

 **Tech Support**
8:30am-5:30pm Pacific Time
(909) 923-3868
www.powerbassusa.com

2XL-1504D

Optimum Sealed Vol.	English	Metric
Gross Vb Internal	2.25 cu.ft	63.7 Liters
Fc, (resonance frequency of of the closed box system)	39Hz	39Hz
F3 (-3dB Cutoff)	34Hz	34Hz
External Dimensions of the enclosure WxHxD, 3/4" (19mm) MDF	17.5 x 18 x 16.25"	44.4 x 45.7 x 41.3 cm
Qtc	0.79	0.79
Pe (Watts-Rms)	150-500 Watts	150-500 Watts
Acceptable Volumes	(1.75 - 3.5 cu. ft)	(49.6 - 99.1 Liters)


Optimum Ported Vol.	English	Metric
Gross Vb Internal	3.5 cu.ft	99.1 Liters
External Dimensions of the enclosure WxHxD, 3/4" (19mm) MDF	17 x 21.75 x 21"	43.2 x 55.2 x 53.3 cm
Internal port opening size, W x H	15.5 x 2.5"	39.37 x 6.35 cm
Internal port Length	27"	68.6 cm
Fb (Box Tuning)	28Hz	28Hz
F3 (-3dB Cutoff)	32Hz	32Hz
Pe (Watts-Rms)	150-500 Watts	150-500 Watts
Subsonic Filter Setting if Applicable	32Hz	32Hz

Note: Due to the vented backplate, you must allow an additional 2" behind the suwoofer when designing your speaker enclosure.



UNPACKING/REPACKING THE WOOFER

Please refer to the enclosed diagram regarding the unpacking/repacking of your woofer. This very specialized woofer from PowerBass is custom packed from the factory to prevent any shipping damage from occurring to the product. It is important that you follow the separate diagram to unpack/repack your PowerBass Cast Super Sub.

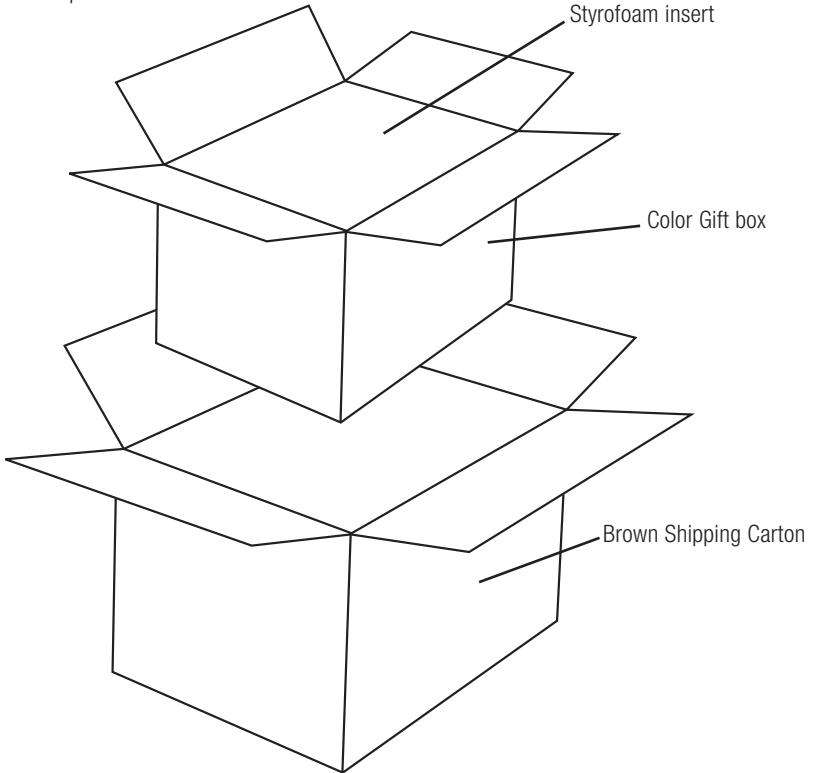

SAVE YOUR PACKAGING

The PowerBass Xtreme "Super Subs" are very heavy and therefore require special packaging to assure their unblemished arrival. Should you need to transport your PowerBass Xtreme Super Sub, you must use **both** the color gift box and the brown shipping carton to ensure safe arrival. This special, original packaging must accompany the PowerBass Xtreme Super Sub in the event of product failure.

NOTE: YOU MUST RETURN THIS PRODUCT IN ALL OF THE ORIGINAL CARTONS TO ASSURE THE WOOFER IS PROPERLY PACKED FOR SHIPPING!

WE WANT YOU LISTENING FOR A LIFETIME

Dear Customer,

Selecting fine audio equipment such as the speakers you've just purchased is only the start of your musical enjoyment. Now it's time to consider how you can maximize the fun and excitement your equipment offers. PowerBass and the Consumer Electronics Association (CEA) want you to get the most out of your equipment by playing at a safe level. One that lets the sound come through loud and clear without annoying, blaring or distortion- and, most importantly, without affecting your sensitive hearing.

Sound can be deceiving. Over time your hearing "comfort level" adapts to higher volumes of sound. So what sounds "normal" can actually be loud and harmful to your hearing. Guard against this by setting your equipment at a safe level BEFORE your hearing adapts.

PowerBass and the CEA want you to listening for a lifetime!



This manual is the exclusive property of PowerBass USA, Inc. Any reproduction of this manual, or use other than its intentions is strictly prohibited without the express consent of PowerBass USA, Inc. Copyright 2013 PowerBass USA, Inc.

INSTALLATION NOTES:

POWERBASS XTREME LIMITED WARRANTY POLICY

PowerBass USA, Inc. offers limited warranty on PowerBass products under normal use on the following terms:

PowerBass Xtreme Speakers are to be free of defects in material and workmanship for a period of one (1) year. The warranty is extended to three (3) years for parts and labor, if an Authorized PowerBass Xtreme Dealer completes the installation.

This warranty applies only to PowerBass products sold to consumers by Authorized PowerBass Dealers in the United States of America. Products purchased by consumers from a PowerBass dealer in another country are covered only by that country's Distributor and not by PowerBass USA.

This warranty covers only the original purchaser of PowerBass product. In order to receive service, the purchaser must provide PowerBass with a valid purchase receipt from an authorized reseller stating the consumer name, dealer, product and date of purchase.

Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at PowerBass's discretion and will not be liable for incidental or consequential damages. PowerBass will not warranty this product under the following situations:

- **Speakers received with bent frames or water damage**
- **Abuse such as holes in the cone, surround or ripped spider**
- **Voice coil damage due to amplifier clipping or distortion**
- **Product that has not been installed according to this owners manual**

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for PowerBass any other liability in connection with the sale of this product.

Please call (909) 923-3868 for PowerBass Customer Service. You must obtain an RA# (Return Authorization Number) to return any product to PowerBass. **The RA number must be prominently marked on the outside of the shipping carton or the delivery will be refused.** Please pack your return carefully; we are not responsible for items damaged in shipping. Return the defective product along with a copy of the original dated retail sales receipt, plus \$12.00 for handling and diagnostic evaluation to:

**PowerBass USA, Inc.,
Attn: Returns (RA# _____)
2133 S. Green Privado, Ontario, CA 91761**

Residents of HI, AK and US territories will be charged for return shipping. All inquires regarding service and warranty should be sent to the above address.

Removed or altered serial numbers will void this warranty



PowerBass Xtreme (PBX) – A division of PowerBass USA, Inc.

2133 S. Green Privado – Ontario, CA 91761

Tel. (909) 923-3868 – Fax (909) 923-8048

www.powerbassusa.com